

2 Port VGA / Audio KVM Switch

User Manual



www.kinankvm.com

@All right reserved by Shenzhen Kinan Technology Co., Ltd.

Date: 2019/01

Version: V1.0


Description

KA2302 is a two port VGA / Audio cable KVM switch. Users can put the main part under the desk, easily switch the computers via Scroll-Lock or remote port selector.

Features

- One KVM console controls two USB VGA computers
- Independent switching of KVM and Audio focus
- Multiplatform support - Windows, Linux, Mac, Unix
- Computer selection via remote port selector, hotkeys\
- Hot pluggable - add or remove computers without having to power down the switch
- Superior video quality - 2048x1536@60Hz


Product Structure

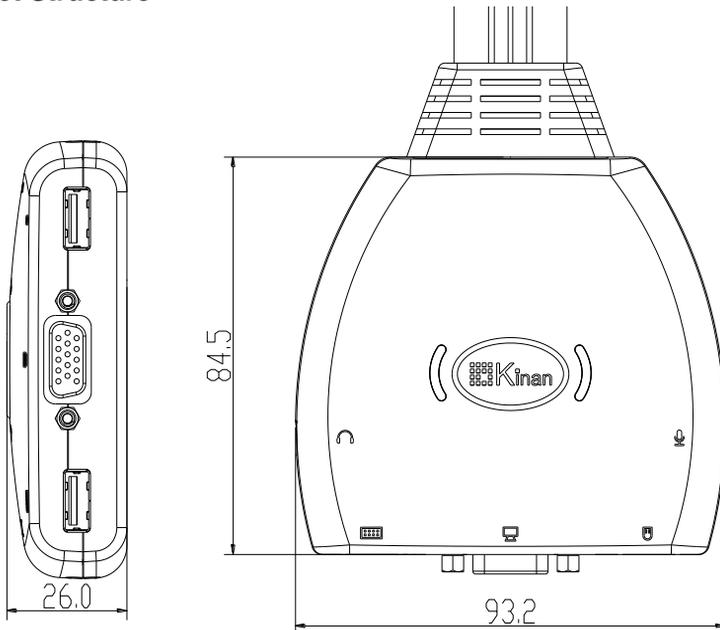

Connection Diagram

Make sure that the power to any device that you connect to the installation has been turned off.

Make sure that all device you will be installing are property grounded

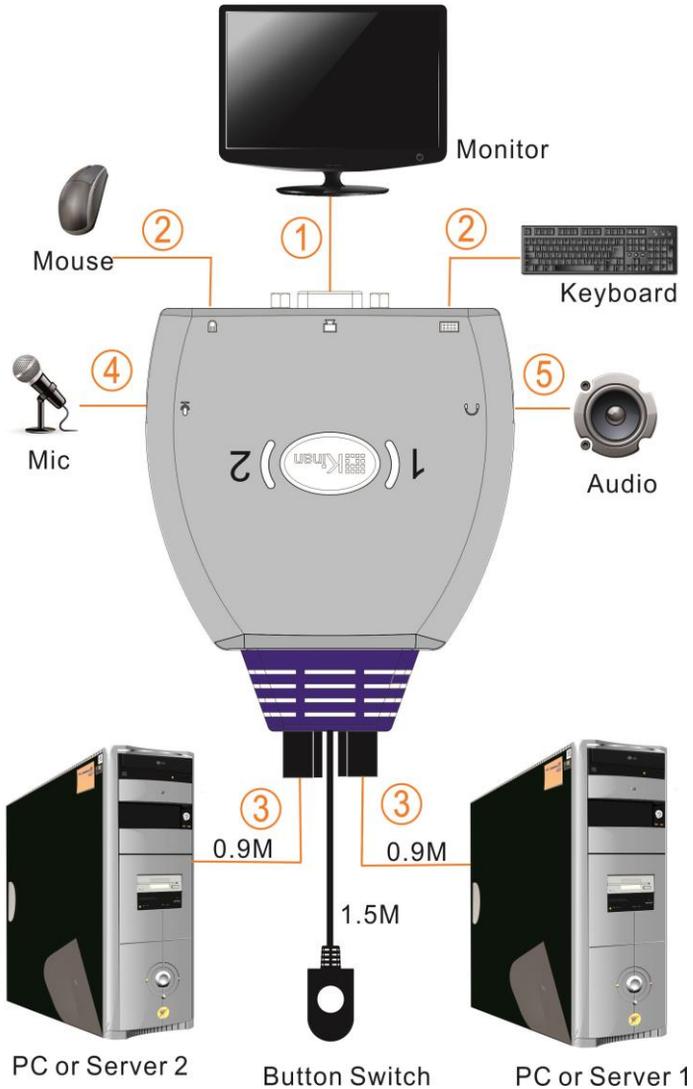

Hotkey

Press **Scroll-Lock** twice in two seconds, the keyboard will exit the hotkey mode if you do not press any hotkey within 2 seconds.

Hotkey commands as below:

Function	Operation	Instruction
Port Switching	Scroll-Lock + Scroll-Lock + Port#	Switch between port 1~2 Press Scroll-Lock twice +2, switch to port 2
	Scroll-Lock + Scroll-Lock + ↑/↓	Switching to Previous or Next port
Auto Scan	Scroll-Lock + Scroll-Lock + S	<ol style="list-style-type: none"> 1. Automatically scan the connected PC or Server, press any key to exit 2. Move the mouse to extend the scan time accordingly 3. LED status indicator flashes to indicate a successful operation
Hotkey Cycling	Scroll-Lock + Scroll-Lock + F	Scroll-Lock → L_Ctrl → Scroll-Lock LED status indicator flashes to indicate a successful operation
Auto Scan time setting	Scroll-Lock + Scroll-Lock + T + (0~99) + Enter	Automatic scanning interval 5~99s, LED status indicator flashes to indicate a successful operation
Audio Lock / Unlock	Scroll-Lock + Scroll-Lock + A	Lock / Unlock the current audio, LED status indicator flashes to indicate a successful operation
Factory Setting	Scroll-Lock + Scroll-Lock + R	Restore factory setting, LED status indicator flashes to indicate a successful operation

Specification

Model		KA2302
Computer Connections		2
Port Selection		Hotkey, Remote Port Selector
Console	Monitor	1x HDB-15 Female(blue)
	Keyboard, Mouse	2x USB type A
	Microphone	1x Min stereo port (pink)
	Speaker	1x Min stereo port (green)
PC	Monitor	2x HDB-15 Female(blue)
	Keyboard, Mouse	2x USB type A
	Microphone	2x Min stereo port (pink))
	Speaker	2x Min stereo port (pink)
LED	Selected	2 (green)
	Power	2 (orange)
Cables	KVM cable	900mm
	Remote port Selector Cable	1500mm
Video Signal		2048x1536@60Hz
Operating Temperature		0 ~ 40 °C
Storage Temperature		-20 ~ 60°C
Humidity		0~80% RH, non-condensing
Net Weight		0.36 kg
Dimension (W x D x H)		93.2mm x 84.5mm x 32.5mm