

---

# Rack Mount 18.5 Console User Manual




### Description

Single port console integrate the monitor, keyboard and mouse in a 1U height device, it can be installed in a standard 19" rack. It can connect one computer to control the monitor, keyboard and mouse.

### Features


- 3 in 1 LCD console integrating the monitor, keyboard and mouse.
- Directly connect computer or KVM switch to control single or multiple computers.
- 18.5 LCD monitor with high brightness, high definition and high resolution.
- Ultra-slim keyboard with 99 keys (82+17) .
- Standard PS/2 touchpad.
- With release catch in front panel.
- Automatic-locking guide rail

### Appearance

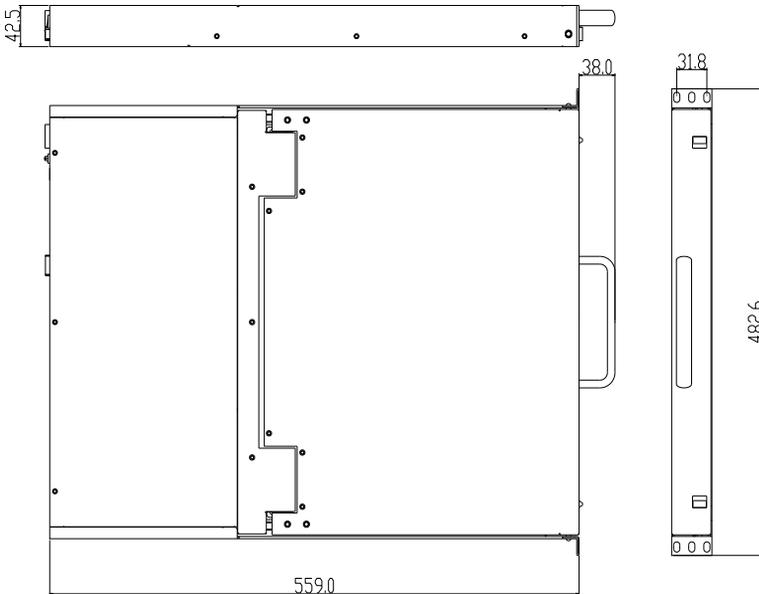

1-1 appearance


**Front View**

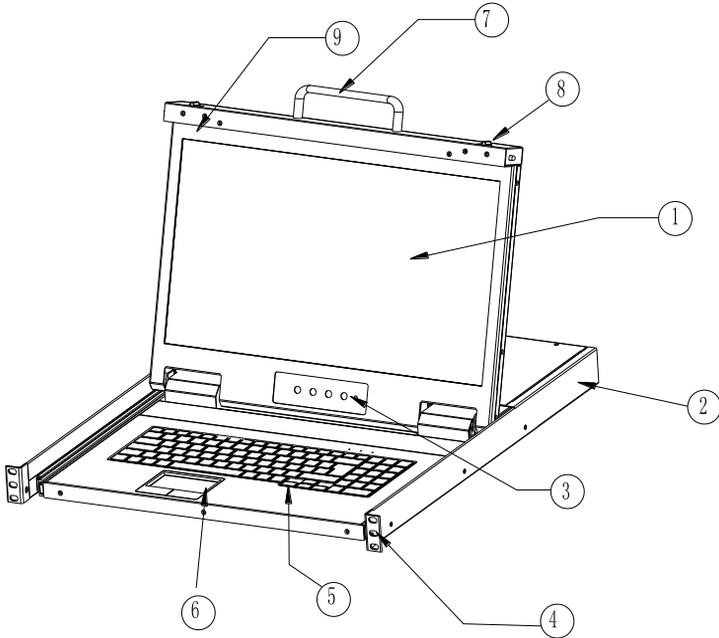

1-2 front view

- 1 LCD Monitor
- 2 Rear Bracket Slot
- 3 Display Menu Buttons
- 4 Mounting Bracket
- 5 Keyboard
- 6 Touchpad
- 7 Handle
- 8 Release Switch
- 9 Display Panel


### Back View

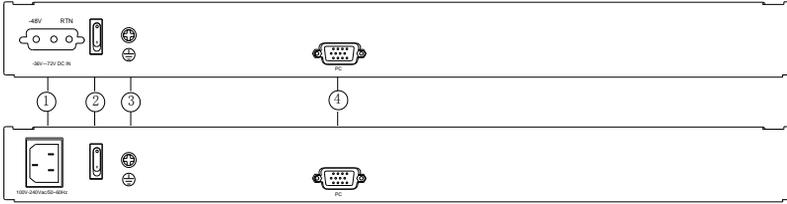

1-3 back view

- 1 Power input(AC or DC)
- 2 Power Switch
- 3 Ground connecting screw
- 4 PC connection port: integrating VGA, keyboard and mouse signal

### Cable Connection

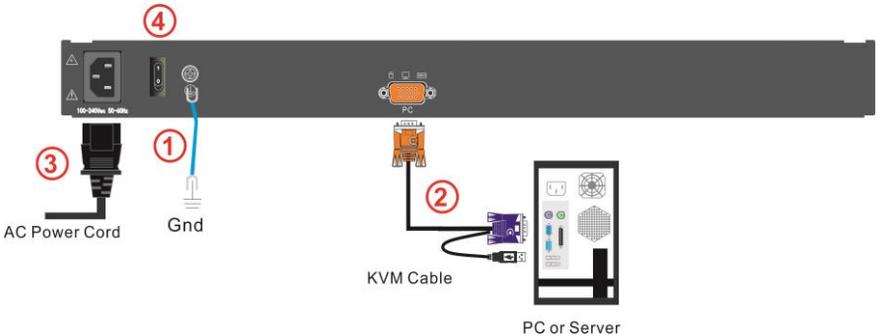

1-4 cable connection


To ensure signal integrity and simplify cable layout, we strongly recommend you use high quality cables with different length as shown in above table.

### Rack Mounting


A standard rack mounting kit is provided to mount the switch in a depth of in a standard 19" rack. For other mounting distance, the rear brackets need to be customized accordingly

18.5" : 620-720mm

With one person hold the switch in place and the other person slides the L bracket into the switch's side mounting brackets from the front to the back, then screws the brackets to the rack. (See below installation diagrams)

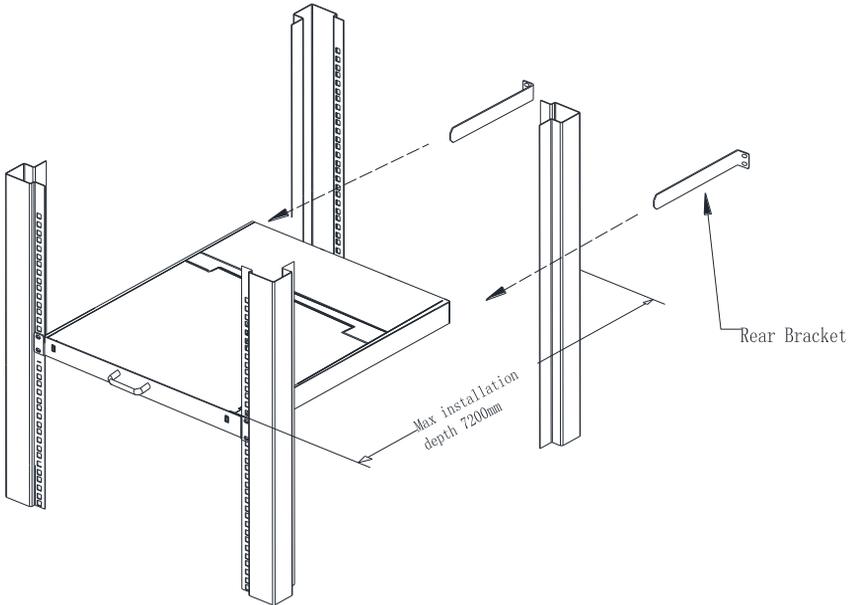


2.1 rack mounting

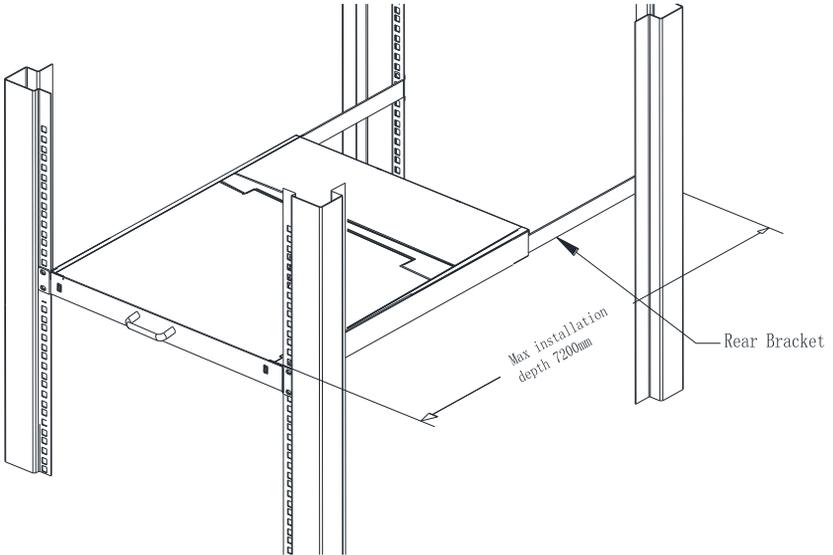

### 2.2 rack mounting

#### Opening the Console


- Power on the KVM after connecting cables.
- Power on the server or PC after power on the KVM.
- Release the release catch.

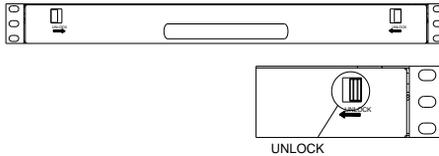

### 2.3 unlocking

**\*Note: The release catch can only do horizontal locking, it can't bear any load.**


- Pull the KVM console all the way out and the slide rail automatically locked to its place.
- Rotate the LCD panel all the way back to expose the LCD screen; the LCD module can be rotated up to 108°.

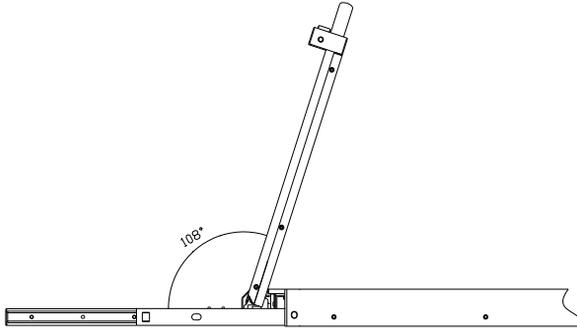

2.4 open angel of the console


**Closing the Console**

- Close the console and the power automatically shut down.
- Push the release catch in the direction of the arrow, push the LED panel all the way in until it automatically lock up.

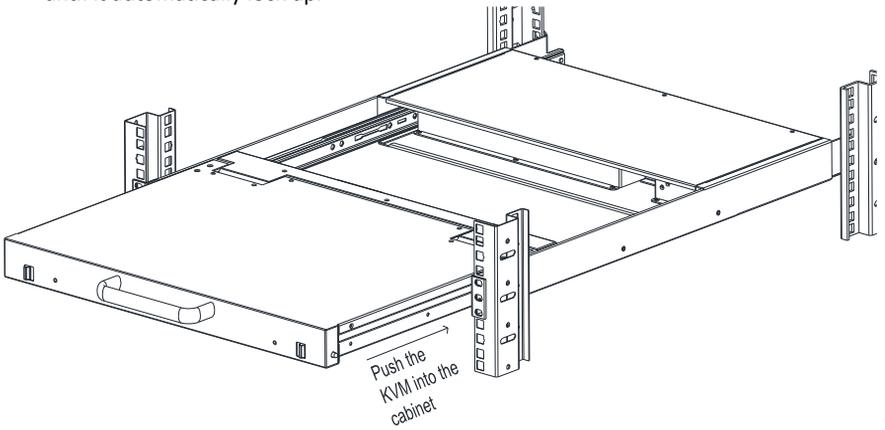

2.5 unlocking the slide rail

## Operating the Monitor

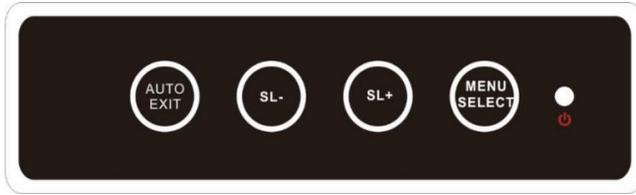

### 3-1 Operating the Monitor

The LED OSD allows you to set up and configure the LED display.

Buttons	Functions
MENU SELECT	Brings up the main menu.
EXIT/AUTO	Exits the current menu and returns to the previous menu or exits the LED OSD. Press AUTO for automatic configuration.
SL-/SL+	Moves the menu to make corresponding adjustment.
LED state	Green: Running Red: Power off or access nonstandard VESA signal Flashing green: Energy saving mode or no signal

Press AUTO if the screen migrates after power on or under other circumstances, then the screen auto-configures to its best display state.

**Note:**

- *It may not be adjusted to its best state if part of the display mode is not standard VESA mode. If so, return back to OSD menu to RESET, then it will revert back to normal.*
- *KLS-1801 It is recommended to set up the display mode at 1366×768, refresh rate at 60Hz.*
- *KLS-2801 It is recommended to set up the display mode at 1920×1080, refresh rate at 60Hz.*

**Specifications-18.5"**

Model		DLS-1801	DLS-2801
Computer Connections	Direct	1	
	Max	1	
Port emulation	Keyboard, mouse	PS/2, USB	
LCD monitor	LCD model	WXGA TFT	FHD TFT
	View area	18.5"	18.5"
	Optimum resolution	1366×768@60Hz	1920×1080@60Hz
	Display color	16.7 M	
	Brightness	250cd/m <sup>2</sup> (Typ)	500cd/m <sup>2</sup> (Typ)
	Contrast ratio	1000 : 1 (Typ)	
	Pixel pitch(mm)	0.300(H) × 0.300(W)	0.213(H) × 0.213(W)
Mouse	X/Y resolution	>1000 points / inch, (40 points/mm)	
	Scroll wheel	Support scroll wheel function	
Keyboard	99 keys (82 keys main keyboard +17 independent small numeric keyboard)		
Input power	100V-240Vac, 50-60Hz, <1.5A		
Power consumption	11W	28W	
Operating temperature	0 ~ 40 °C		
Store temperature	-20 ~ 60 °C		
Humidity	0~80% RH, non-condensing		
Net weight	11kg		
Product dimension (W × D × H)	448mm×560mm×42.5mm		
Package dimension (W × D × H)	765mm×615mm×185mm		
Optional power input	-36V— -72Vdc		