


QUAD Screen Multiviewer(HD1204)

- Control 4 computers with one single device
- Support Quad screen, H screen, PIP screen, two screen and full screen
- Support kvm seamless and without black screen connection between different servers
- Support HDMI audio split output
- Support PCM2, 5.1, 7.1 channel, Dolby 5.1, DTS5.1 output and Mic Output
- Support USB2.0 HUB
- Support Overall/independent switching of LWN, multi screen display, audio, UTC Peripherals , and provide LED indicator respectively
- Support HDMI digital Monitor . fully complied with HDMI 1.3a and HDCP, resolution is up to 1080P(1920x1200)
- Support IR remote control, easily choose audio port, KVM port, etc.
- Support Broadcast , which can control few servers at the same time



Screen Display Mode

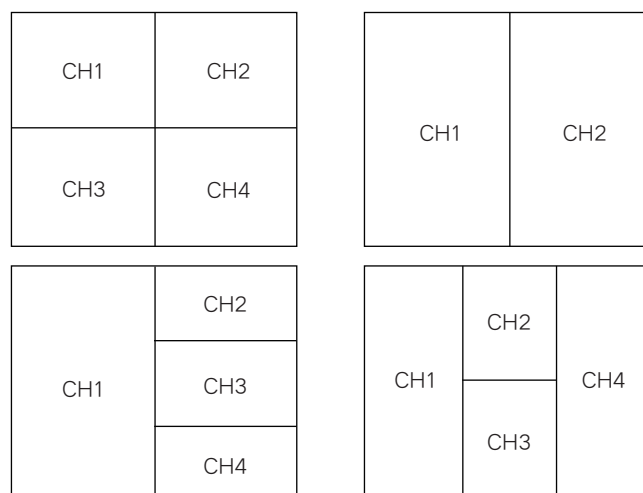

Product

HDMI Screen Multi-viewer is a high-performance screen splitting and switching device, which realizes 4 channels of HDMI signals on the same high-definition display device, and has multiple split screen effects. Multi-screen HDMI KVM switch setup is quick and easy, just plug the cable into the appropriate port. Because the switch directly obtains keyboard and mouse input, no software is required, no complicated installation procedures are involved, and compatibility issues are not considered.



IR Remote Control



Seamless Switch




Multi-viewer



Audio Switch




2.LEDs 1. Pushbutton

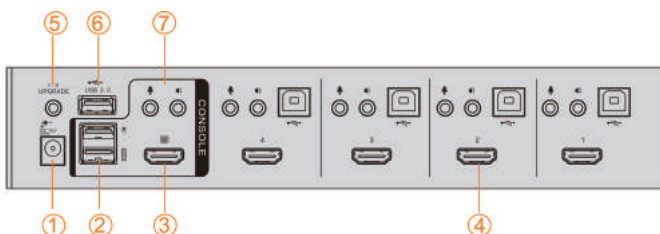


① ② ③ ④ ⑤ ⑥ ⑦

SPLIT DISPLAY

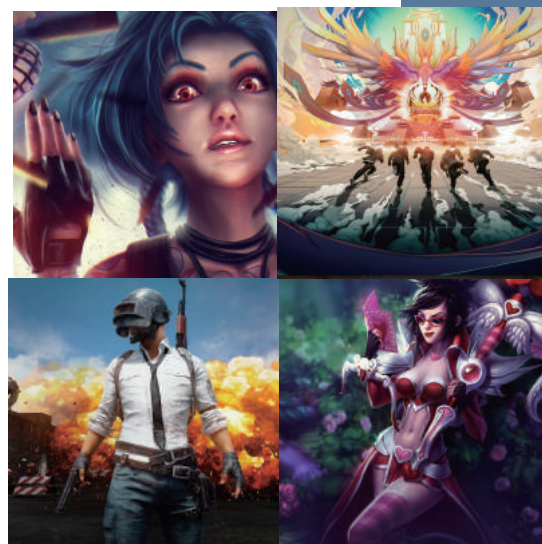

THIS PICTURE IS A CREATIVE DISPLAY. IF YOU HAVE ANY QUESTIONS, PLEASE CONTACT CUSTOMER SERVICE!

HDMI Screen Multi-viewer(HD0104)

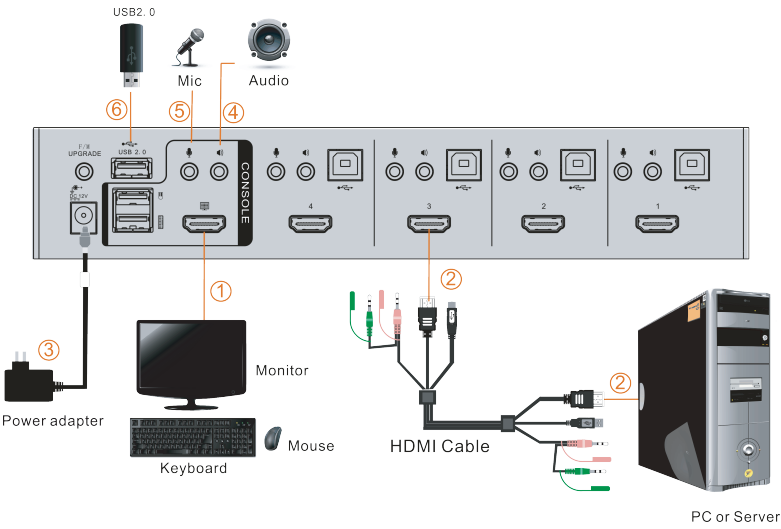




Connection Diagram

Output Device(HDMI): support monitor, projector, TV, etc.
Input Device(HDMI): support PC, server, laptop, SP3, etc.



Remote Control

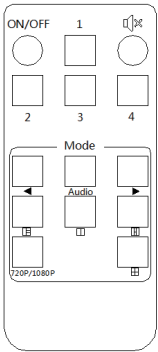

No.	Name	Specification
1	ON/ OFF	On/Off
2	<u>1</u>	Channel 1
3		Silent Mode
4	<u>2</u>	Channel 2
5	<u>3</u>	Channel 3
6	<u>4</u>	Channel 4
7		Left Screen Switching
8	<u>Audio</u>	Audio Switching Right
9		Screen Switching
10		PIP Screen
11		Two Screen
12		H Screen
13	<u>720P/1080P</u>	720P/1080P
14		QUAD Screen

Function		HD1204
HDMI Device		4
Port Selection Screen		Button, Remote Control
Display		QUAD Screen Display
Connector	Console	Monitor
		Keyboard/Mouse
		Mic
		Speaker
	KVM	Monitor
		Keyboard/Mouse
		Mics
		Speaker
Switch	Power	1*DC Socket
	USB2.0	2*USB type A(black)
	Upgrade Port	1.*3.5mm Jacket(black)
LEDs	Port Selection	5*Button
	Audio	5*(green)
	KVM	5*(green)
	KVM	5*(green)
I/R Value		DC 12V
Resolution		1080P(HDTV) /1920*1200
Power Consumption		5W
Simulation		USB
Environment	Keyboard/Mouse	
	Operating Temperature	0-40℃
	Storage Temperature	-20-60℃
	Humidity	0-80%RH, Non-condensing
Physical Features	Material	Metal, Plastic
	Weight	0.7kg
	Dimension	264mm*48.5mm*71mm



Parameter