

2 Port DVI KVM Switch with Audio

DV1102




Overview

The 2 Port DVI USB KVM Switch with Audio & USB 2.0 Hub allows you to control up to 2 computers from a single console (keyboard, mouse and monitor). Switch between computers with hot keys, mouse or port selection buttons. Plug-and-play setup does not require software installation.

Product Features

- Control up to 2 computers or DVI devices
- Support DVI audio split output
- Support USB2.0 HUB
- Multiplatform support - Windows2000/XP/Vista, Linux, Mac and Sun
- Computer selection via front panel pushbuttons, hotkeys and mouse
- Support hot-plugging
- Supports widescreen resolutions
- Superior video quality -1920 x 1200 @60Hz
- Independent switching of KVM, USB, and Audio focus

Connection Diagram

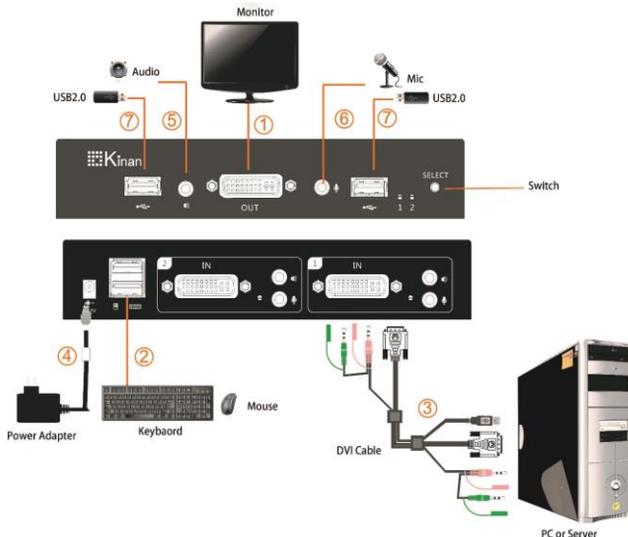

Specifications

| | | | | |
|-----------------------|-------------|---------------------------|-----------------------------|--|
| Model | | DV1102 | | |
| Computer Connection | | 2 | | |
| Port Selection | | Hotkey, Pushbutton, mouse | | |
| Connector | Console | Monitor | 1 x DVI-I (24+5) | |
| | | Keyboard/Mouse | 1 x double layer USB type A | |
| | | Mic | 1 x Min stereo port (pink) | |
| | | Speaker | 1 x Min stereo port (green) | |
| | PC | Monitor | 2 x DVI-I (24+5) | |
| | | Keyboard/Mouse | 2 x USB type B | |
| | | Mic | 2 x Min stereo port (pink) | |
| | | Speaker | 2 x Min stereo port (green) | |
| | USB2.0 port | | 2 x USB type A | |
| | Power | | 1 x DC socket | |
| Switch | | Port Selection | 1x button | |
| LEDs | | Selected | 2 (Blue) | |
| Resolution | | 1920 x 1200 @60Hz | | |
| Power Consumption | | DC 5V -12V | | |
| Operating Temperature | | 0 – 40 °C | | |
| Storage Temperature | | -20 – 60°C | | |
| Humidity | | 0~80% RH, non-condensing | | |
| Net Weight | | 0.4kg | | |
| Dimension (W × D × H) | | 170 × 74 × 32.5mm | | |